



Ningbo MEC Industry And Trade Co., Ltd.

Tel : 0086-574-66831478/ 87383760

Fax : 0086-574-87383750

Email : sales@nbmec.com , sales@signmaker.cn

Website: : www.nbmec.com , www.signmaker.cn

“喷头宝”----喷头保养专家

1. 让您轻轻松松做到每天清洗喷头，天天浸泡喷头。
2. 绝对避免清洗液回流到二级墨盒。
3. 并能让你在喷画过程中随时清洗墨盒。
4. 安装简便，不需更改机器上的任何结构。
5. 兼容性强，适用于国产所有品牌和型号的户外喷绘机和部分进口机型。

我们为您赢得时间,降低故障率,提高效率,并延长喷头寿命,节约成本,将喷头保养中的人为失误直接降到零.

Printhead Guard: An expert to maintain the print head.


1. Helps to clean the print head daily in a very easy way.
2. Avoids cleaning solution return flow to the secondary ink tank.
3. To clean the ink tank at any moment. You need **NOT** to stop the printing process.
4. Easy to install. You need **NOT** to modify any machine structure or parts.
5. High compatibility. Compatible with all types of any brand of Chinese inkjet printers and some overseas inkjet printers.

- Printhead Guard wins you time!
- Printhead Guard decreases the failures and increase the work efficiency.
- Printhead Guard lengthens the life of print heads and cuts the cost.
- Printhead Guard decrease man-made mistakes in print head maintenances to Zero!

Address : 3F,NO.333 DAZHA ROAD JIANGBEI DISTRICT,
NINGBO ZHEJIANG,,P.R.CHINA Postal code: 315020

Tel: (86) 574 66831478/87383760, Fax: (86) 574 87383750

使用说明 (USER MANUAL)

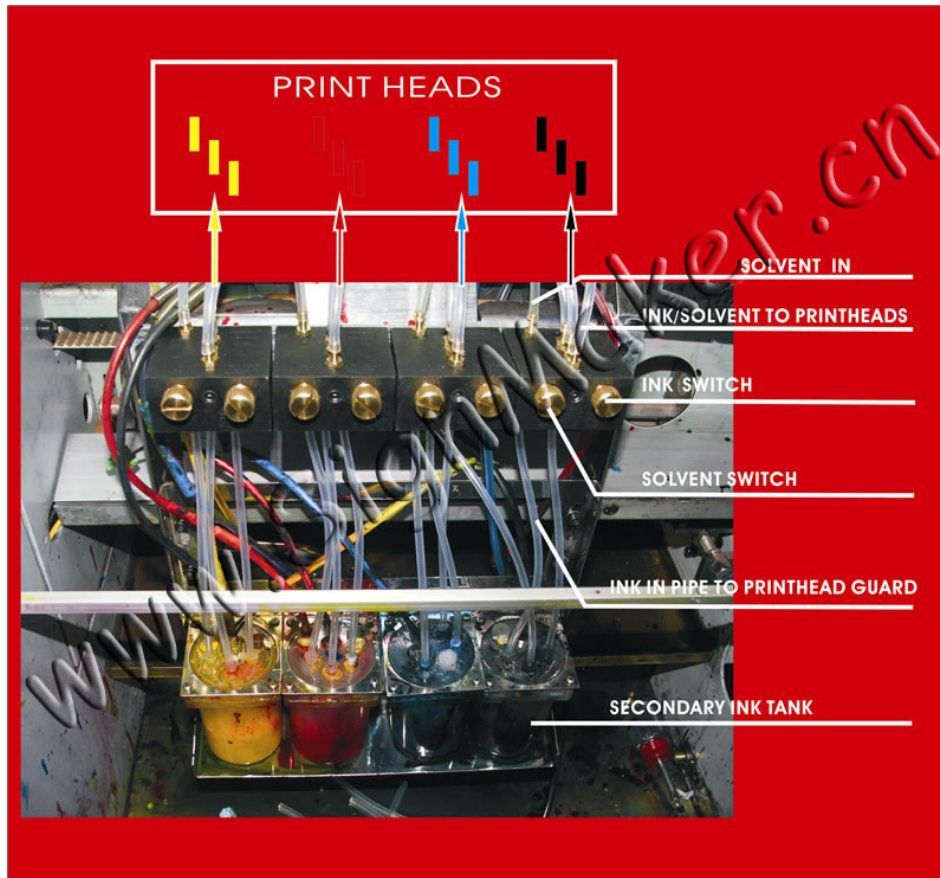

一. 结构图(Structure Drawing, as shown above.)

二. 文字说明

- 1、先将“喷头宝”用螺丝固定在小车架的二级墨盒上方。
- 2、再把二级墨盒与喷头之间的墨管在适当的位置剪断，然后按图所示接上即可。

三. 使用方法

- 1、每天关机的时候，关闭墨水开关，打开清洗液开关。用针筒注入清洗液，将喷头内的墨水清洗干净，用原有的托盘装入清洗液浸泡喷头即可。
- 2、开机时，关闭清洗开关，打开墨水开关，压墨即可喷画。

2. Instruction

- a. Install the Printhead Guard on the trolley frame on top of secondary ink tank with proper screws.
- b. Cut the ink pipe linking secondary ink tank to print head at the proper place. And connect the Printhead Guard as shown drawing.

3. Using method

- a. After power off the printer, turn off the ink switch on Printhead Guard and turn on the cleaning solution switch. Inject the cleaning solution and clean the print head. And soak the print head in the cleaning solution.
- b. When power on the printer, turn off the cleaning switch on Printhead Guard and turn on the ink switch. Fill the ink and ready to print.